

SANDING


ELECTRONIC THEODOLITE

ET SERIES




LASER THEODOLITE ET-L SERIES


SPECIFICATION

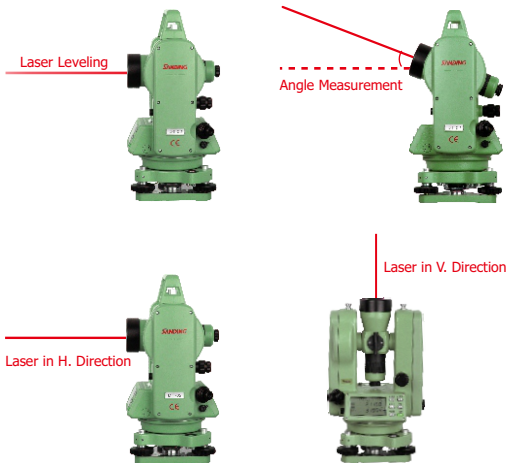

Simple Buttons, Complete Functions

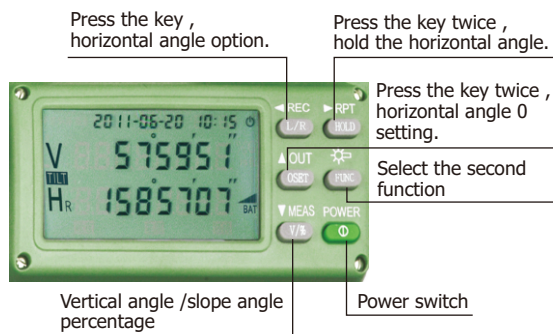

ACCESSORIES



	ET-02/ET-02L	ET-05/ET-05L
TELESCOPE		
Image	Erect	
Magnification	30X	
Effective Aperture	45mm	
Resolution	3"	
Field of View	1°30	
Minimum Focusing Distance	1.4m	
Stadia Ratio	100	
Stadia Constant	0	
Tube Length	157mm	
ANGLE MEASUREMENT		
Measurement method	Incremental Photoelectric Encoding	
Raster Disk Diameter (Vhz)	79mm	
Minimum Reading	1"/5" (Optional)	
Accuracy	2"	5"
Horizontal Angle	Dual	
Vertical Angle	Dual	
DISPLAY		
Display Type	2 Sides, Large LCD	
LASER POINTER		
Laser Range	Be seen up to 100m away	
MEMORY		
Internal memory	SPace for 256 pairs of H.V. angle	
SENSITIVITY OF VIAL		
Plate Vial	30"/2mm	
Circular Vial	8' /2mm	
AUTO VERTICAL COMPENSATOR		
System	Liquid-Electric Detection	
Working Range	± 3	
Accuracy	1"(Liquid-Electric Detection)	
OPTICAL PLUMMET		
Image	Erect	
Magnification	3X	
Focusing Range	0.5m~∞	
Field of View	5°	
PHYSICAL CHARACTERISTICS		
Operating Temperature	-20°C- +45°C	
Internal Power Supply	Rechargeable Ni-H Battery/ AA Battery	
Voltage	ET: 6VDC	
Operating Time	10 hours	
Dimension	L145 ×H318×W179mm	
Weight	5.2kg	



SANDING OPTIC-ELECTRICS INSTRUMENT CO., LTD.

Add: 2/F, Surveying Building (He Tian Building), NO.26, Ke Yun Road, Guangzhou 510665, China
 Tel: +86-20-22826691 E-mail: export@sanding.com.cn export@sandinginstrument.com